Platform Cable Replacement

Table Of Contents

Opening the Front Door

Open the front door.

Moving up the Platform

From the menu choose *Maintenance* and then *Move the platform*. Move up the platform using the upper button.

DO NOT MOVE THE PLATFORM TOO HIGH. THE NOZZLES CANNOT HIT THE BUILD TRAY.

Unplugging the Power Cable

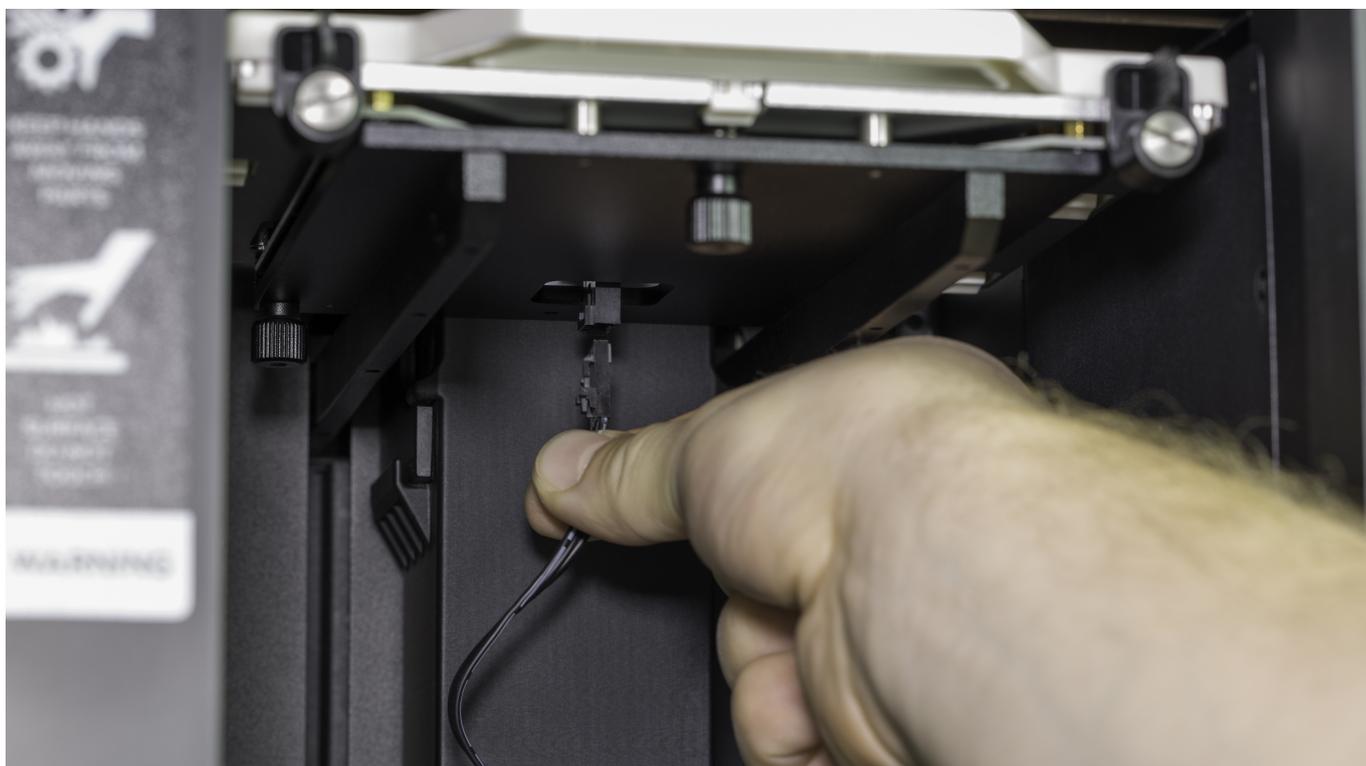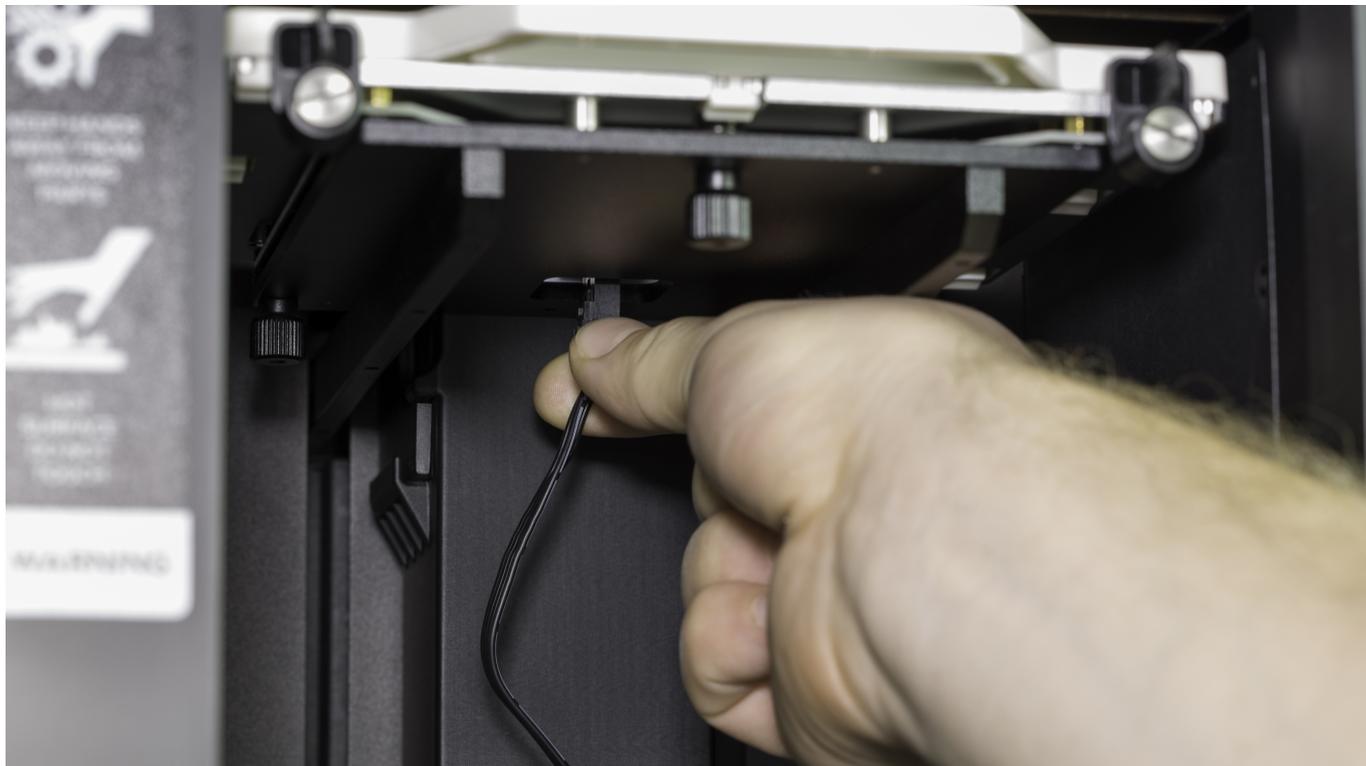Turn off the printer and unplug the power cable.

Unplugging the Platform Cable, part 1

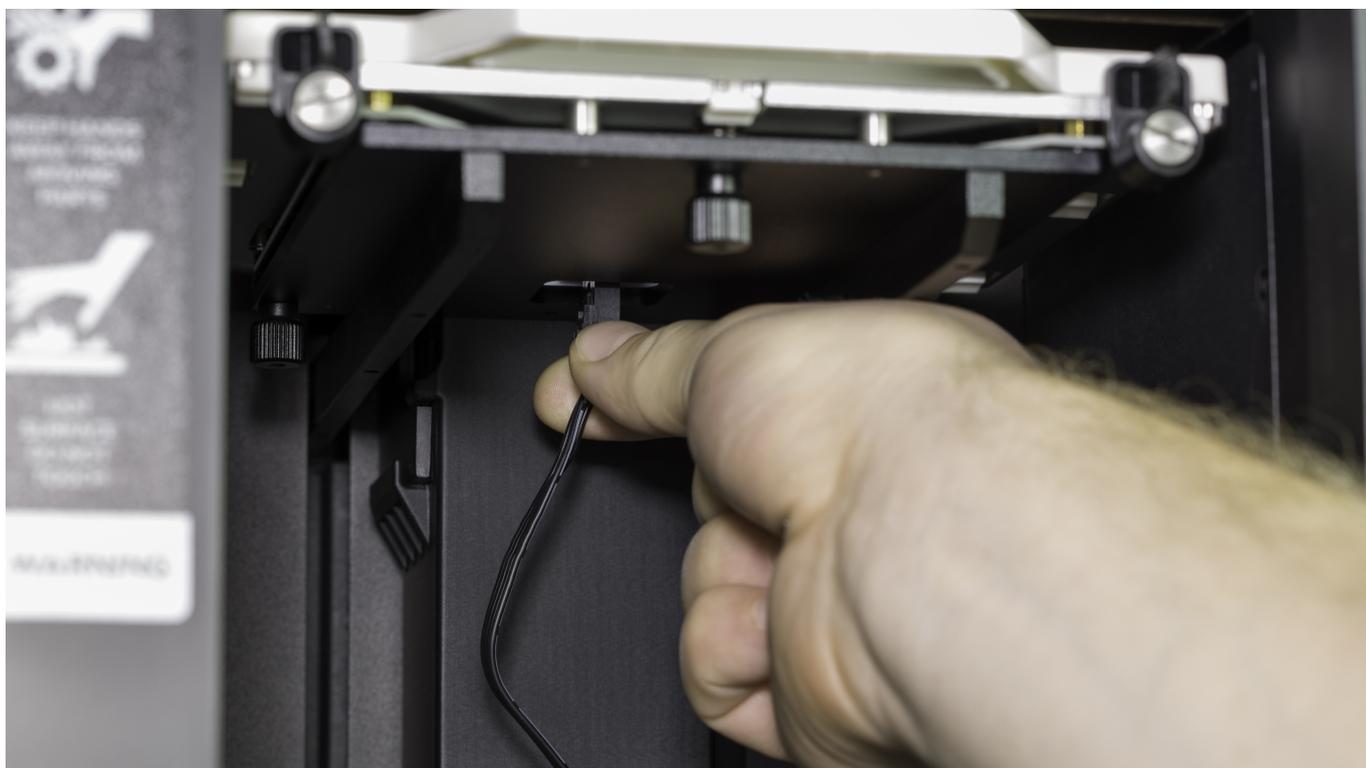Unplug the platform cable from the platform.

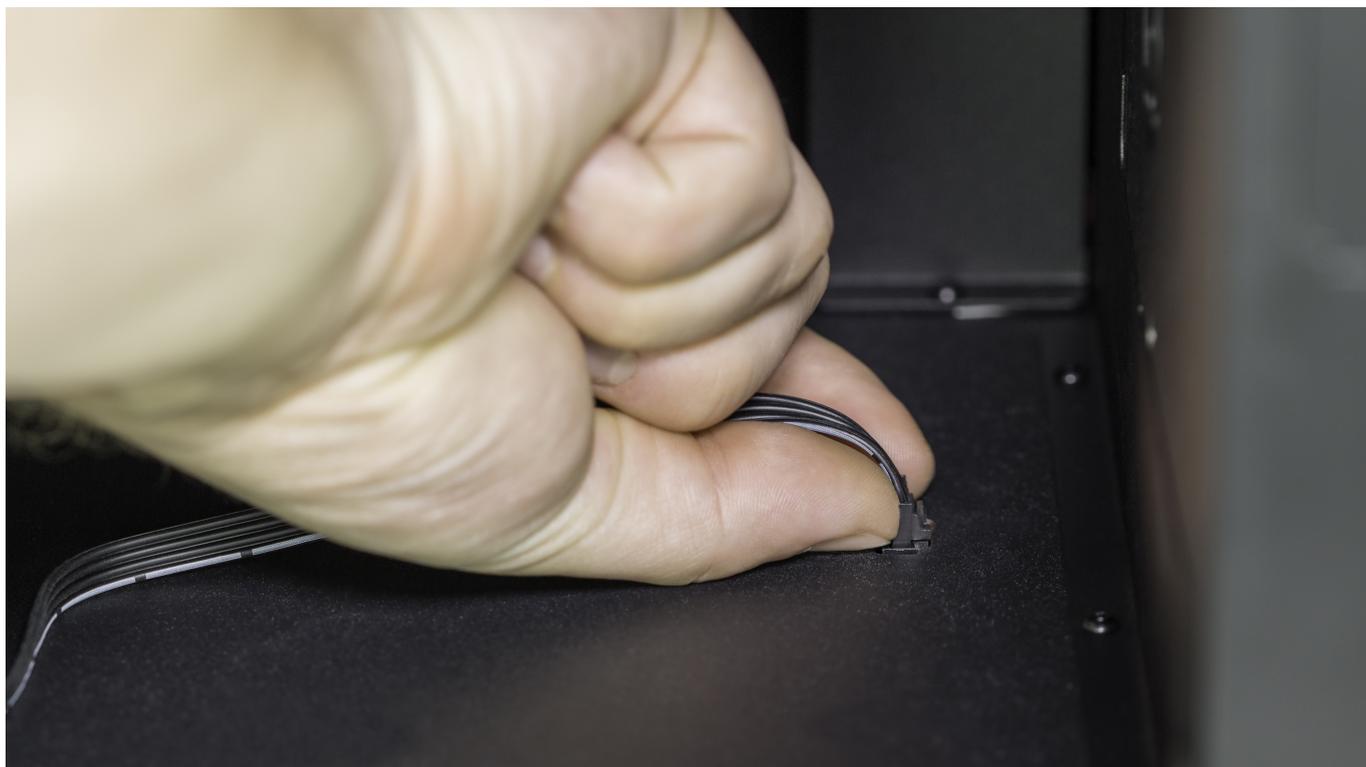# Unplugging the Platform Cable, part 2

Unplug the platform cable from the bottom plate and remove the cable from the printer.

Plugging in the Platform Cable, part 1

Prepare a new platform cable and plug it into the platform.

Plugging in the Platform Cable, part 2

Plug in the other connector of the platform cable to the bottom plate.

Plugging in the Power Cable

Plug in the power cable and turn on the printer.