

# Heatbed Cable Replacement

SOURCE:

<https://support.zortrax.com/m300-plus-heatbed-cable-replacement/>

## Table Of Contents

Unplugging the Power Cable

Unplugging the Heatbed Cable (from the Z-axis Cover)

Platform Removal

Unplugging the Heatbed Cable (from the Platform)

Plugging the Heatbed Cable (into the Platform)

Platform Installation

Plugging the Heatbed Cable (into the Z-axis Cover)


Plugging the Power Cable

## Unplugging the Power Cable




Turn off the printer and unplug the power cable.

## Unplugging the Heatbed Cable (from the Z-axis Cover)

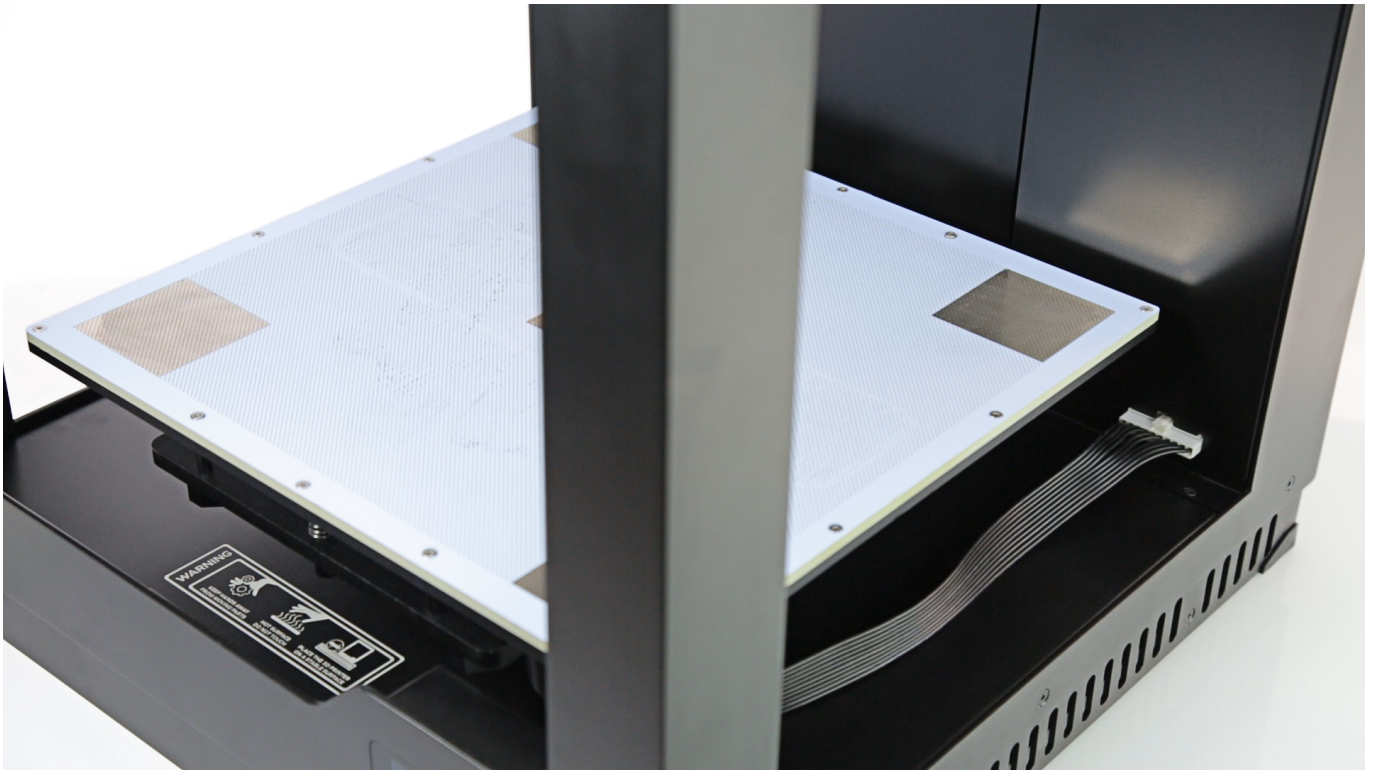


Unplug the heatbed cable from the Z-axis cover.

## Platform Removal

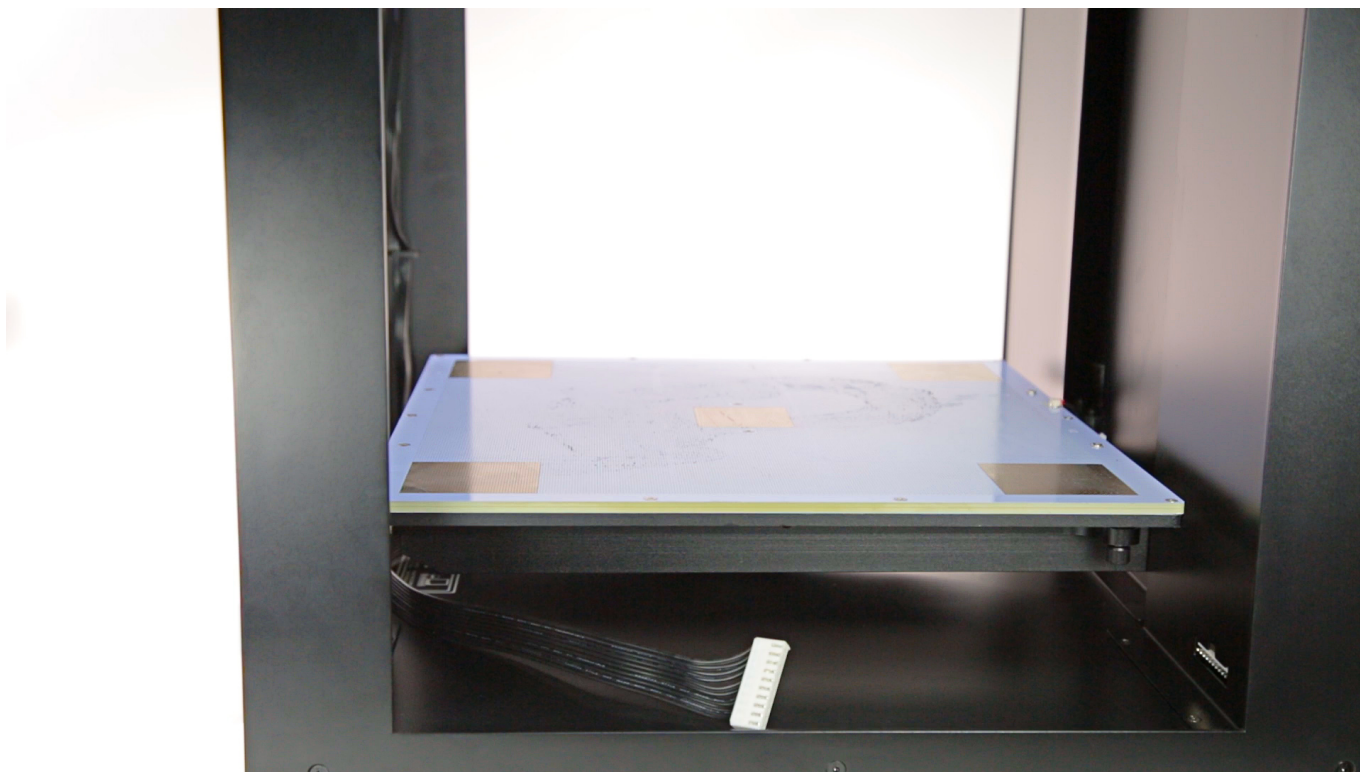

Remove the platform with the heatbed cable from the printer.


## Unplugging the Heatbed Cable (from the Platform)

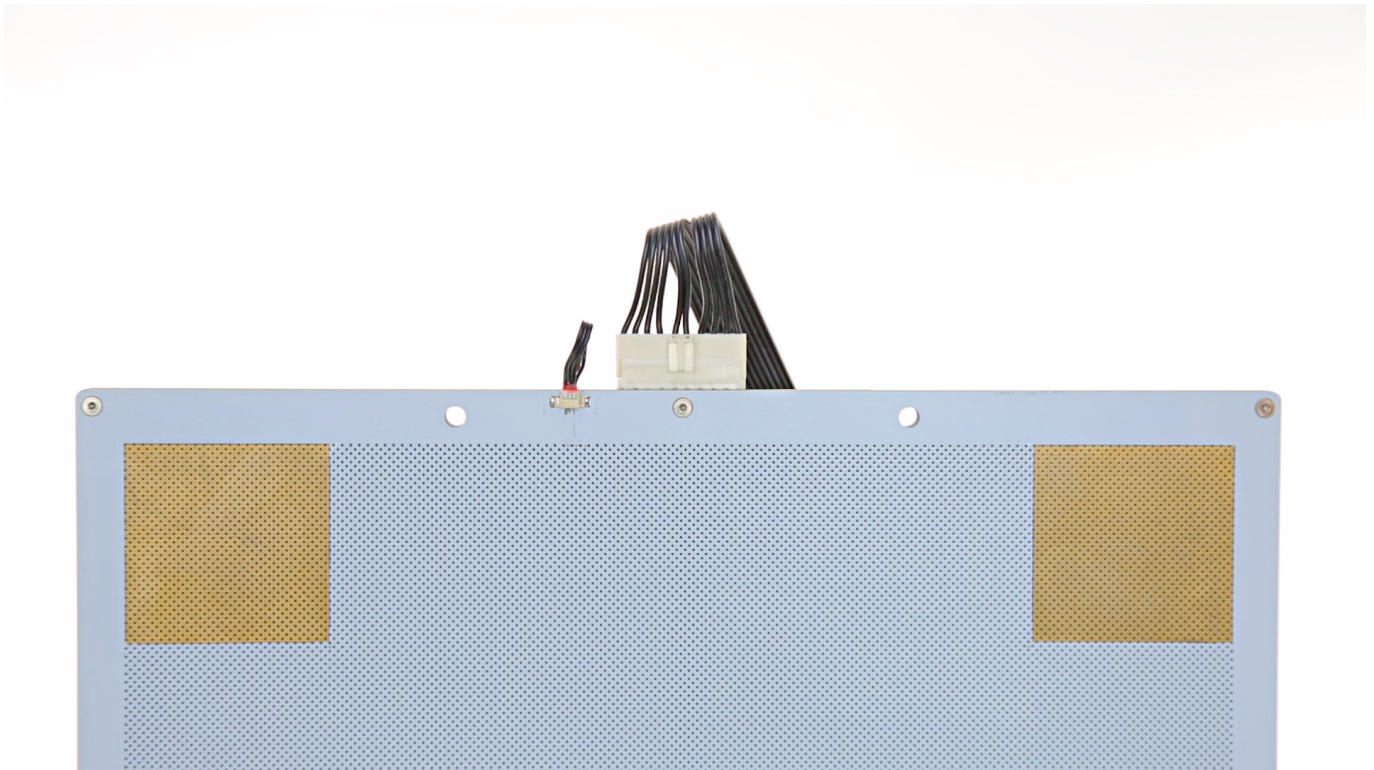

Unplug the heatbed cable from the platform.




## Plugging the Heatbed Cable (into the Platform)

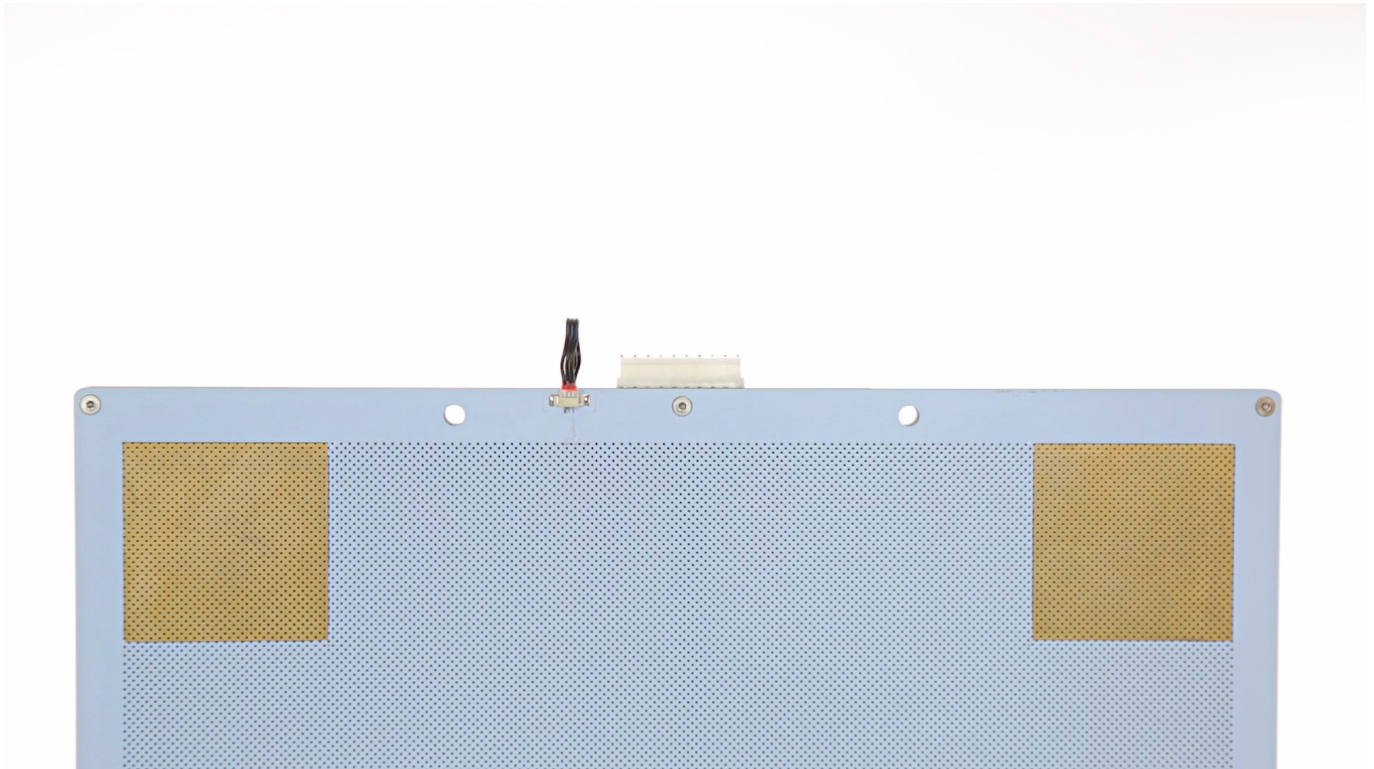

Plug the new heatbed cable into the platform.


## Platform Installation

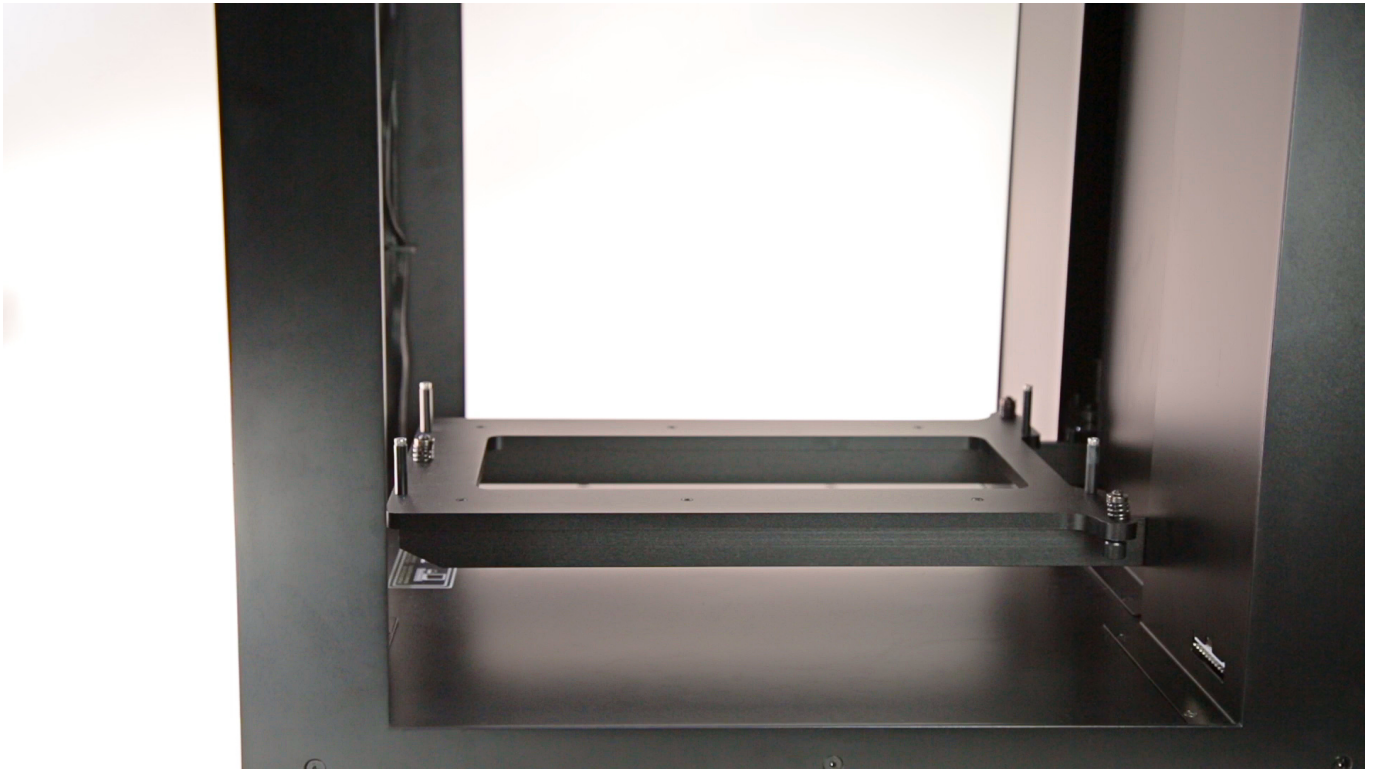

Pass the heatbed cable behind the heatbed mount and install the platform back in the printer.



## Plugging the Heatbed Cable (into the Z-axis Cover)

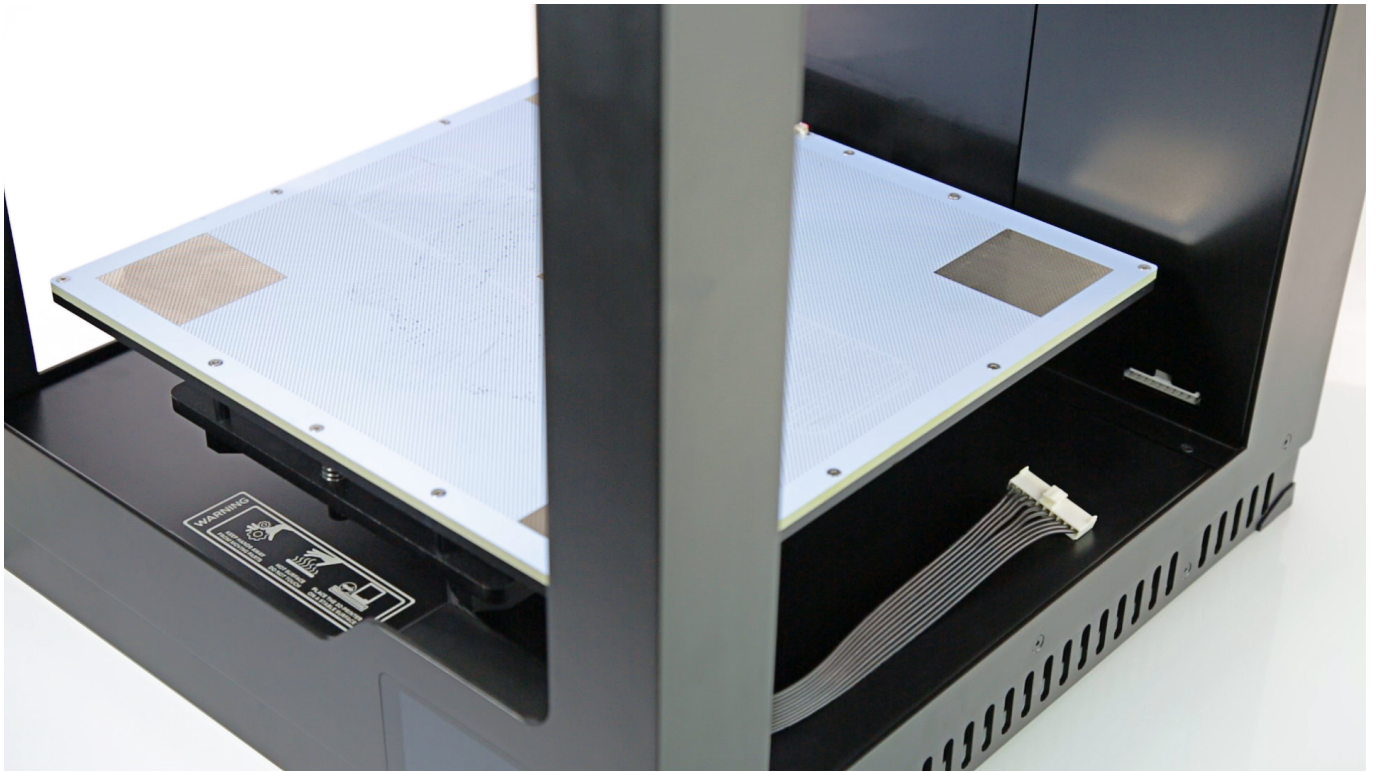

Plug the heatbed cable into the Z-axis cover.

## Plugging the Power Cable



Plug the power cable in.