

Removing the Residues

SOURCE:


<https://support.zortrax.com/removing-the-residue/>

Table Of Contents

Removing the Support, part 1
Smoothing Down the Surface
Removing the Support, part 2
Polishing the Surface

If your model has been already printed and you have removed it from the platform, at first you have to remove all the unnecessary elements – the raft and support – before following the available post-processing procedures: spackling, gluing, painting or acetone vaporizing method. Learn more about those methods in [Designing & Post-processing](#) category.

Removing the Support, part 1

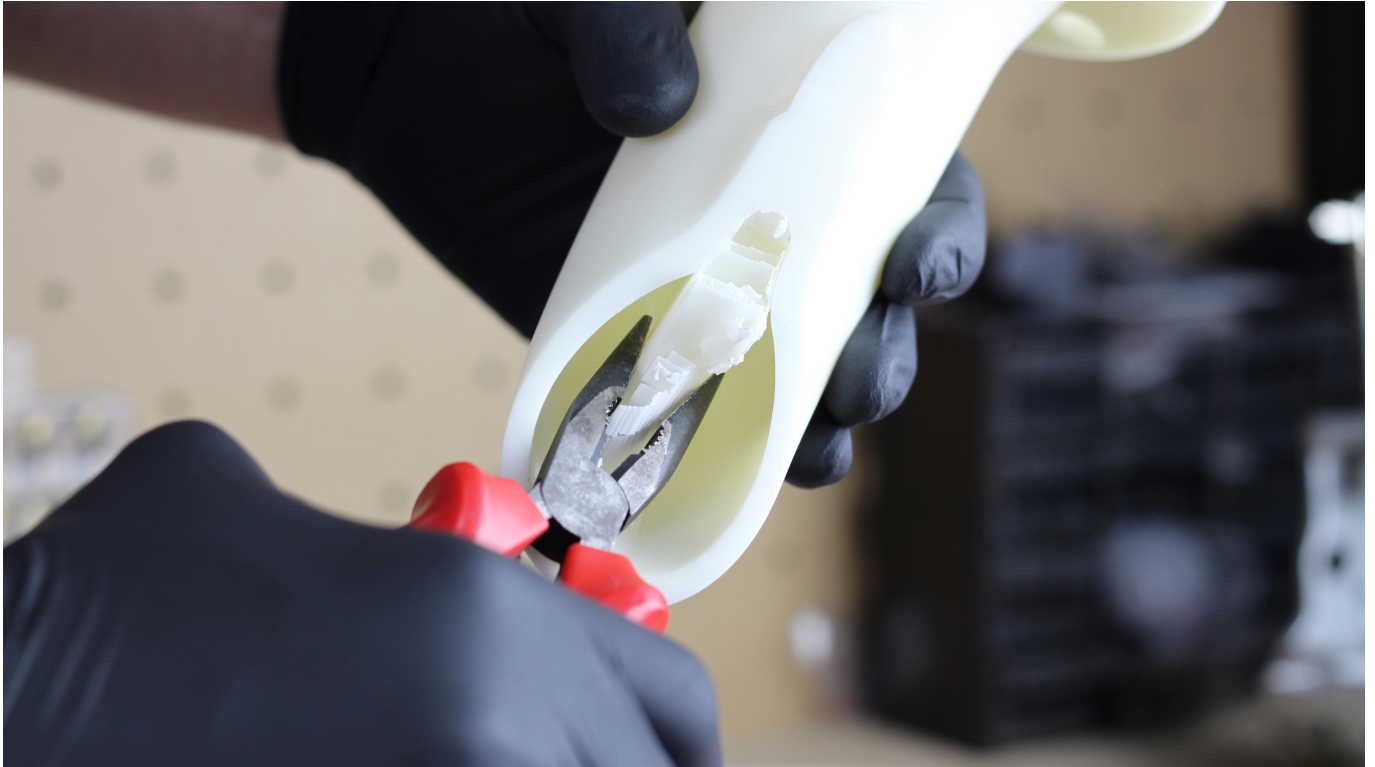

Use pliers to remove the support structures from your print.




Use a scalpel to remove the remaining support from your model.

Smoothing Down the Surface



If the residues are difficult to remove, use a grinder to smooth down the surface of the model.

Removing the Support, part 2

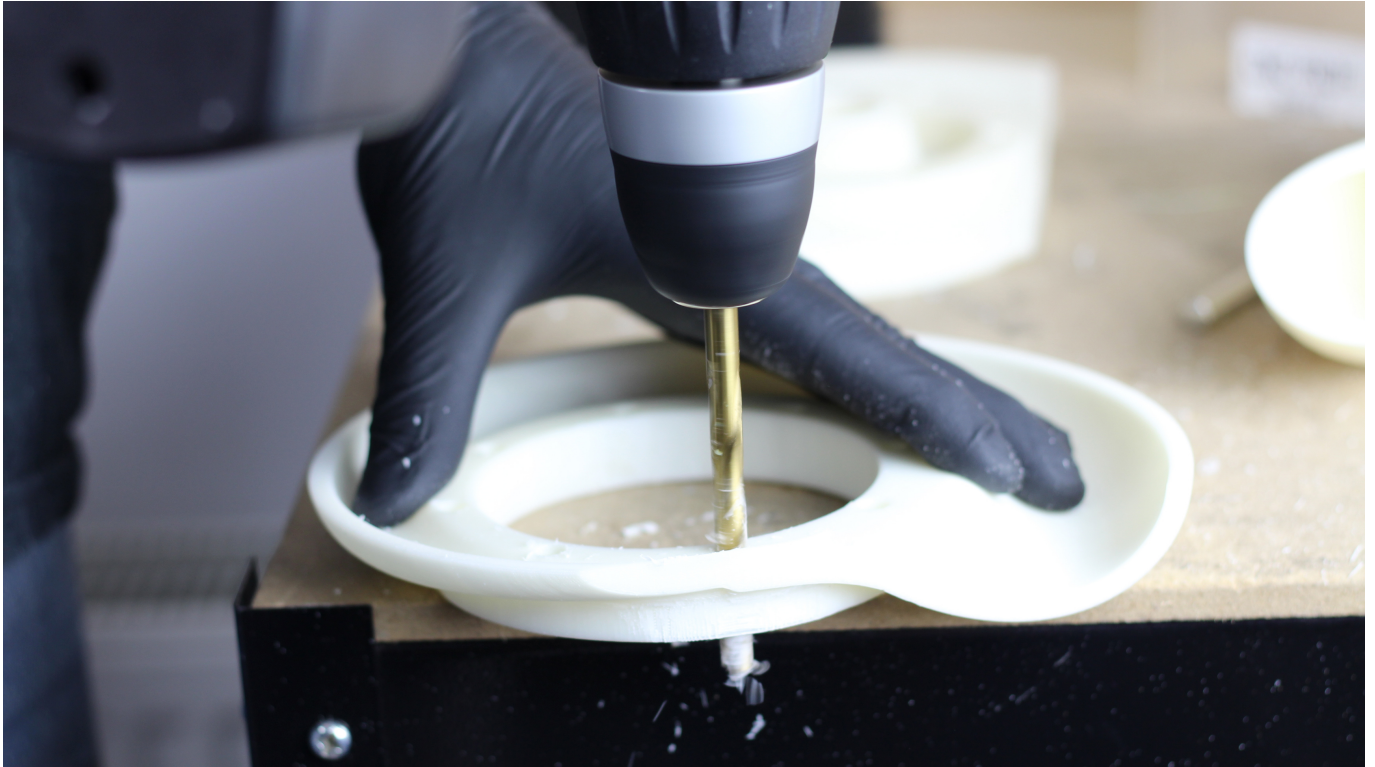

If there are any holes in your print, remove the support from them using a drill or a drill-driver.

Polishing the Surface



Smooth down the surface of your print with sandpaper. Use sandpaper with 80 grit to even all the imperfections. Use sandpaper with 160 grit to make sanding lines less visible.