

Removing the Print

SOURCE:

<https://support.zortrax.com/m-series-removing-the-print/>

Table Of Contents

Unplugging the Power Cable
Unplugging the Heatbed Cable
Platform Removal
Removing the Print
Platform Installation
Plugging the Power Cable


Unplugging the Power Cable



Turn off the printer and unplug the power cable.


Wait about 30 minutes until the platform and the print cool down.

Unplugging the Heatbed Cable

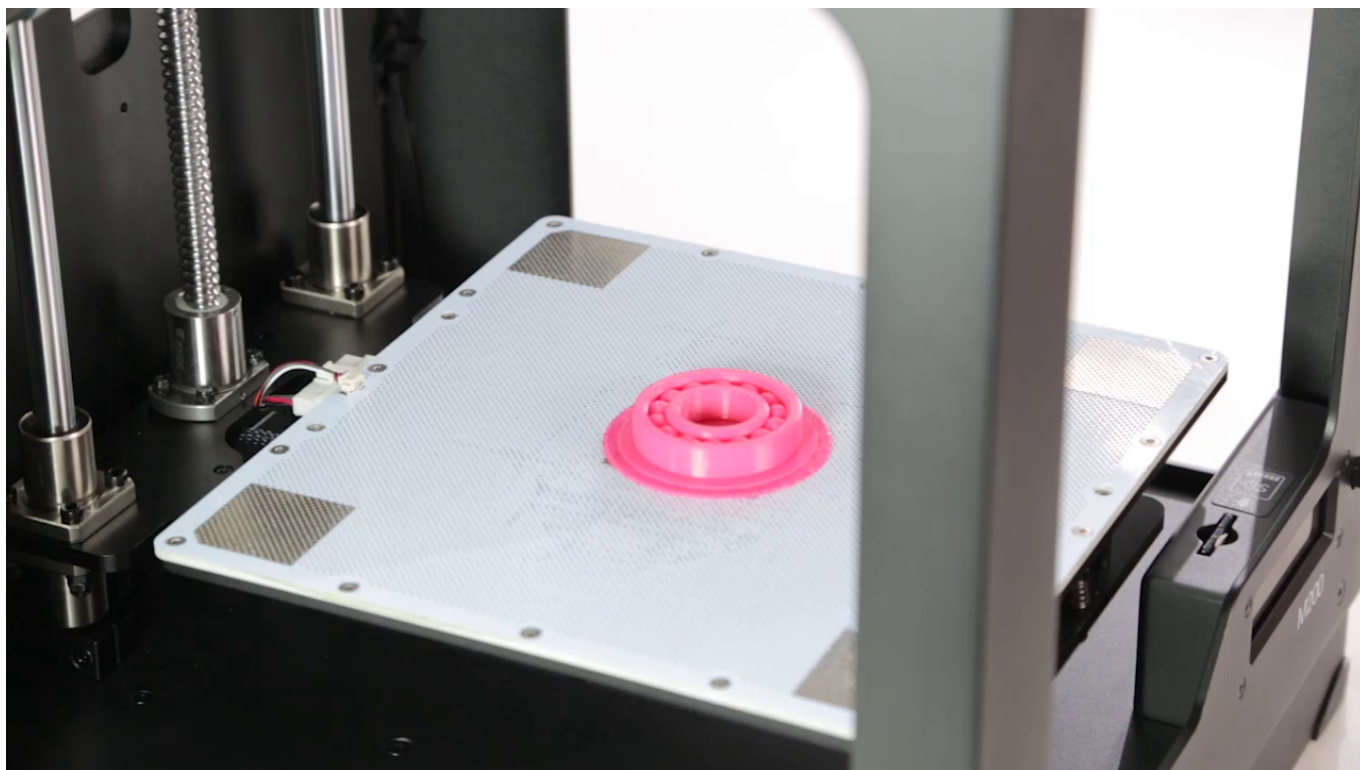


Unplug the heatbed cable from the platform. Both the big and small connectors need to be unplugged.

Platform Removal

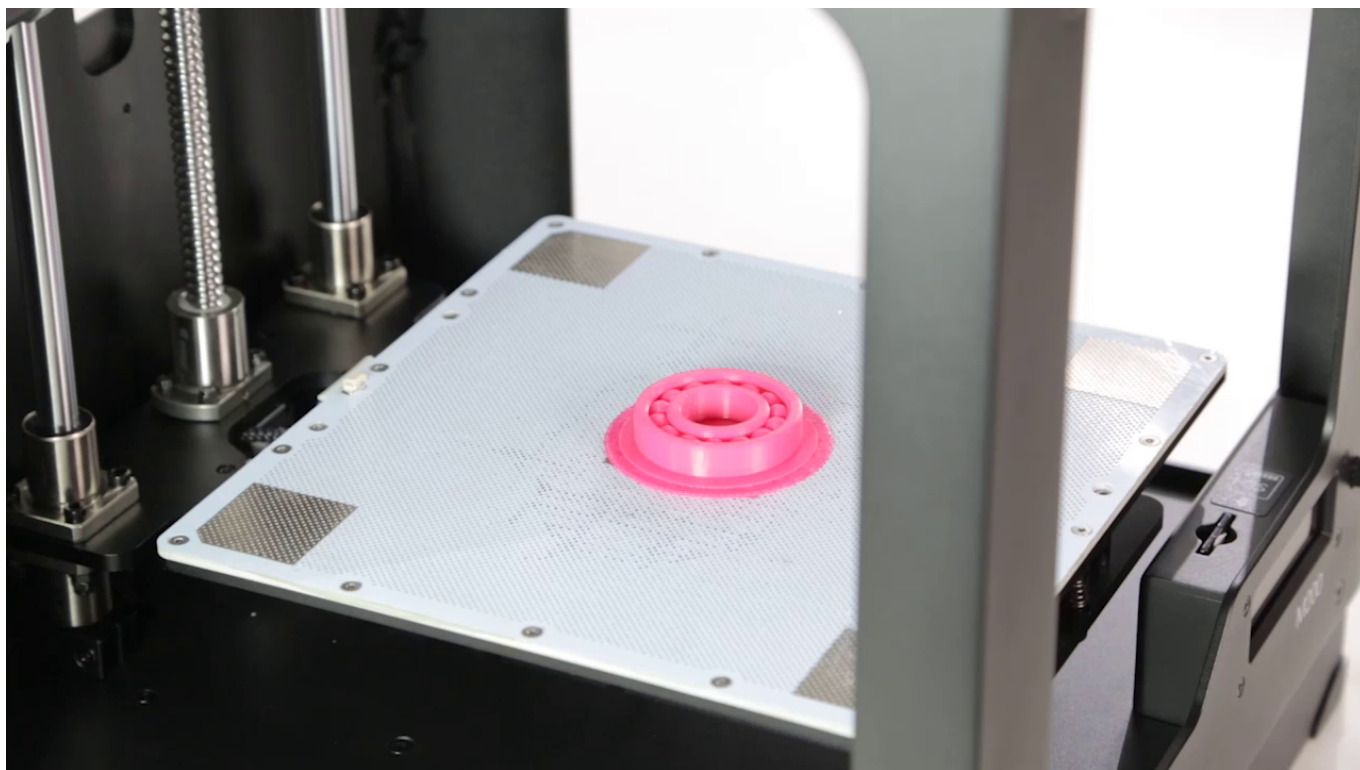

Remove the platform from the printer.

Removing the Print

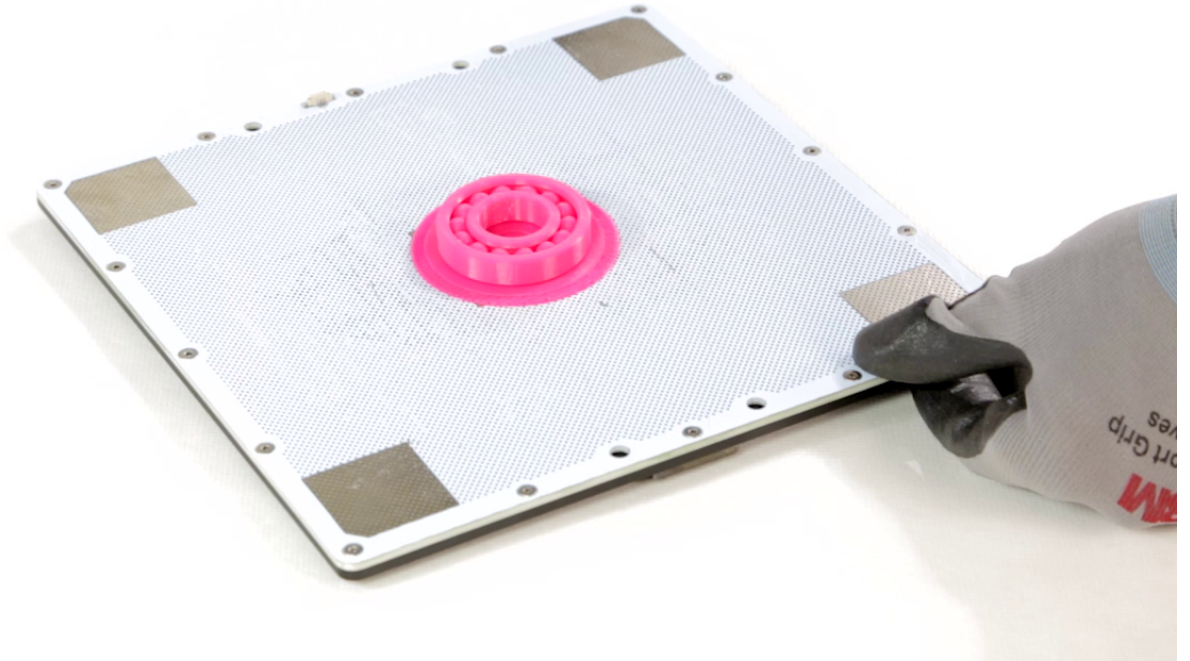

Use the spatula to remove the print.

Remove the print very carefully. Do not point the blade of the spatula towards the platform connectors.

Platform Installation



Put the platform back in the printer and plug the heatbed cable in. Both big and small connectors need to be plugged in.

Plugging the Power Cable



Plug the power cable in.