

Perforated Plate Replacement

SOURCE:

<https://support.zortrax.com/m200-perforated-plate-replacement/>

Table Of Contents


Unplugging the Power Cable
Unplugging the Heatbed Cable
Platform Removal
Unscrewing the Perforated Plate
Cleaning the Heatbed
Securing the Perforated Plate
Platform Installation
Plugging the Power Cable

Unplugging the Power Cable




Turn off the printer and unplug the power cable.

Unplugging the Heatbed Cable

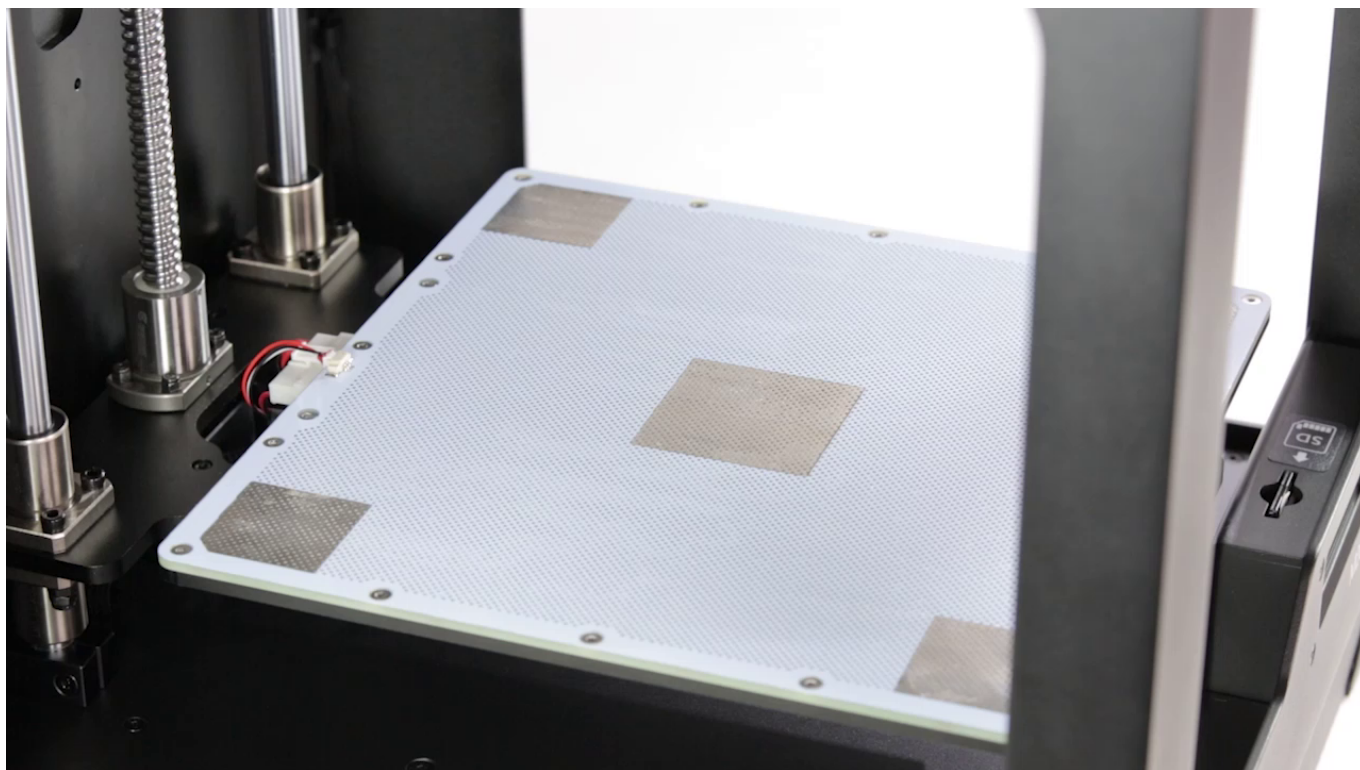


Unplug the heatbed cable from the platform. Both big and small connectors need to be unplugged.

Platform Removal

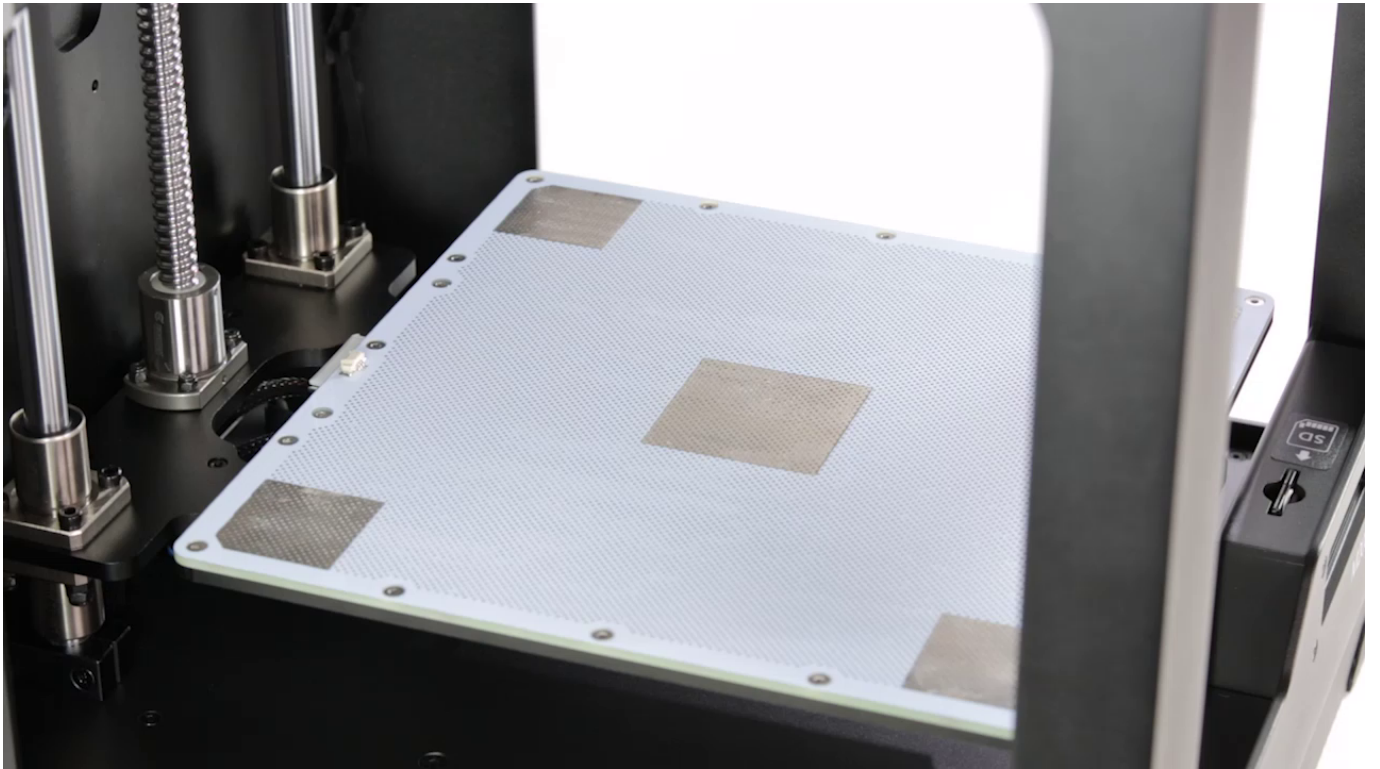


Remove the platform from the printer.

Unscrewing the Perforated Plate

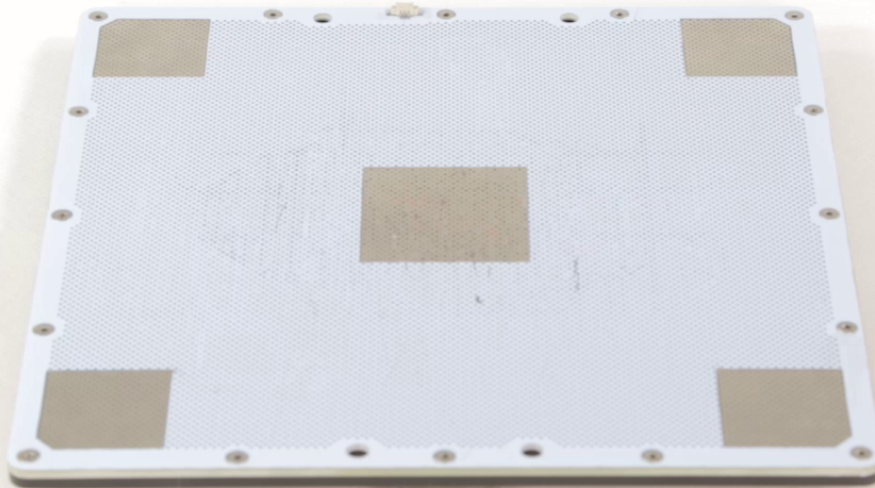

Unscrew the screws to separate the perforated plate from the heatbed.

Cleaning the Heatbed

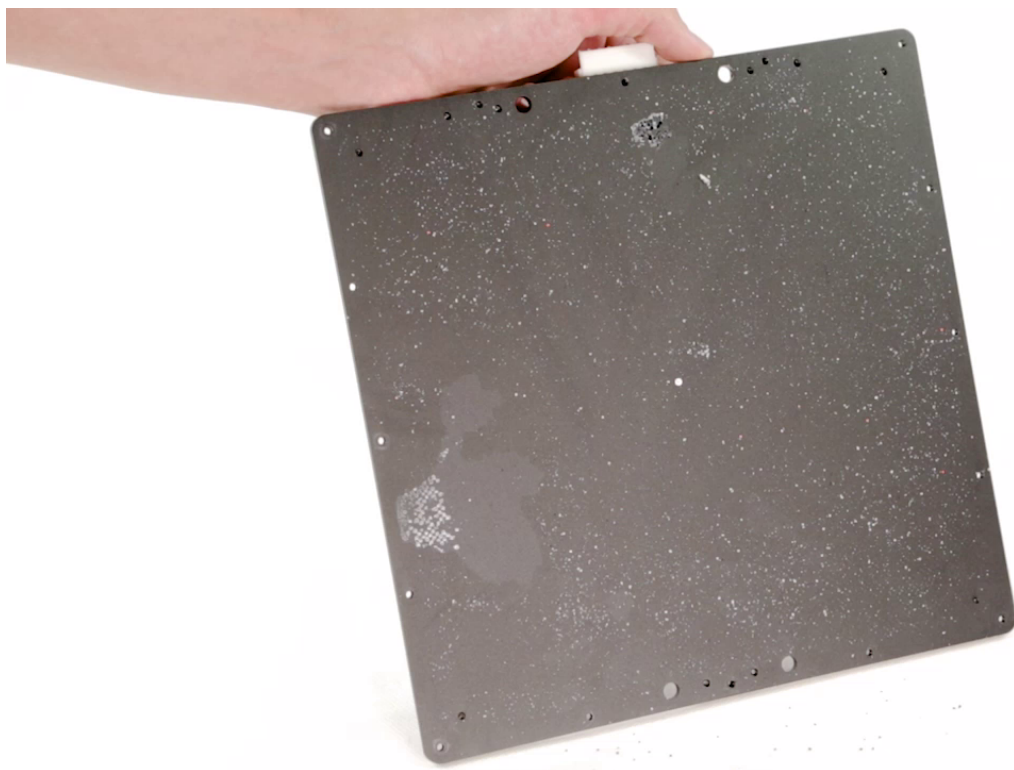


Remove material residues from the heatbed using a piece of cloth or, if it is necessary, use a spatula.

Securing the Perforated Plate



Secure the new perforated plate to the heatbed with the screws.

Platform Installation

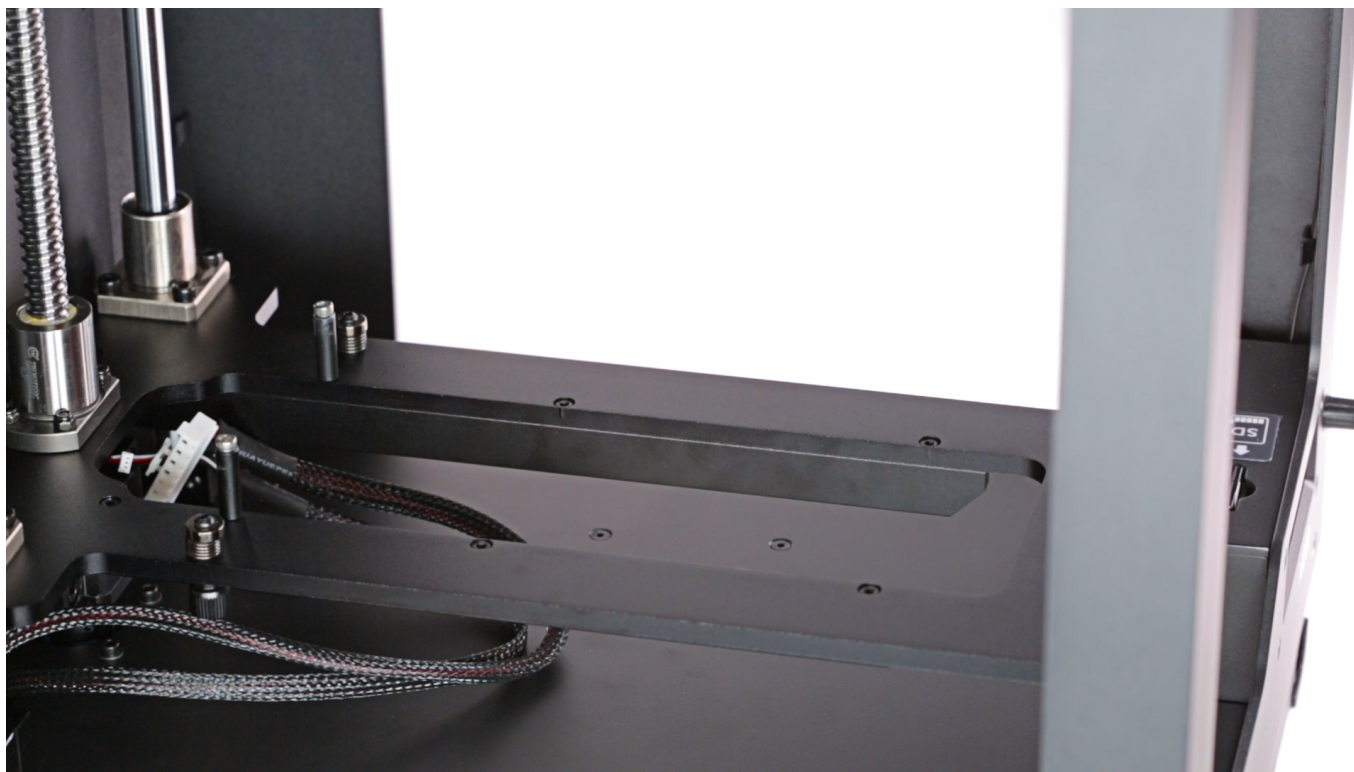

Put the platform back in the printer and plug the heatbed cable in. Both big and small connectors need to be plugged in.

Plugging the Power Cable



Plug the power cable in.